


SYMBOL	MATERIAL	SOLE PLATES	
1	1/2" CDX (3/8") 1 SIDE W/ 8D @ 6" AND 12"	16D @12" OC	5/8" DIA. X 10" AB @
2	1/2" CDX GYPSUM BOARD 2 SIDES W/SD COOLER NAILS @ 7" OC BLOCKED	16D @12" OC	5/8" X 10" AB @ 48" OC
3	1/2" CDX (3/8") 1 SIDE W/ 8D 6" AND 12" OC BLOCKED	SDS 1/4" X 6" AND 12" OC	5/8" DIA. X 10" AB-MIN. 2 PER 2'8" WALL PANEL
4	1/2" CDX (3/8") 2 SIDES W/ 8D 6" AND 12" OC BLOCKED W/ 3X MATERIAL	SDS 1/4" X 6" @ 6" OC	5/8" DIA. X 112" AB-MIN. 3 PER 2'8" WALL PANEL

- SHEARWALL NOTES:**
- ALL SHEARWALLS (SW'S) TYPE TO AND BRACED WALL REQUIRE 3X MATERIAL AT ALL PLYWOOD EDGES AND 3X PLATES MIN. W/12" LONG ANCHOR BOLTS.
 - ALL ANCHOR BOLTS TO HAVE 2" X 2" X 3/16" PLATE WASHERS.
 - BRACED WALLS AND COMPLY WITH SECTION 2320.11.4 CBC FOR ALTERNATE BRACE WALLS; MIN. HD2A OR PH02 EACH END OF WALL.
 - 7/16" OSB MAY BE SUBSTITUTED FOR 1/2" PLYWOOD EXCEPT AT SHEARWALL
 - PLYWOOD EDGE NAIL (PEN) TO ALL POSTS WITH HOLDDOWNS. (SEE PLANS FOR SIZE AND LOCATION)
 - NOTE: SDS SCREWS ARE A PRODUCT OF THE SIMPSON CO.
 - NOTE: AB REFERS TO ANCHOR BOLTS.

LEGEND:
 ° DEGREES
 ∅ DIAMETER
 R RADIUS

Connor McCall
 Designer
 (707) 387-6180
 connormc1140@gmail.com
 www.ddgt.net/connormc1140

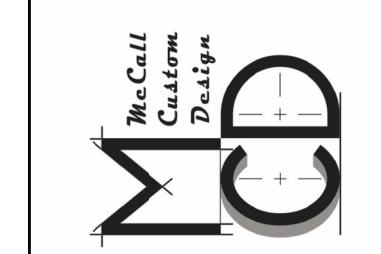

TOLERANCES UNLESS SPECIFIED:
 DECIMAL INCHES:
 X = ±.020
 XX = ±.010
 XXX = ±.005
 FRACTIONAL: 1/16"
 ANGLES ±1 DEGREE
 SURFACES ±1/32"

COURSE: DDGT 240
 AUTOCAD DRAWING NAME: MCCALL RESEDCENCE
 FIG #: N/A
 DRAFTER: C. MCCALL
 DATE: 9/12/2019
 SCALE: 1/4" = 1'
 PAGE #: 1 OF X